# **Flexi Wood Ultra Lite**

PROFESSIONAL AUDIO / Hi-FI & HOME CINEMA



## Description

Upgraded with a Melamine finish, Flexi Wood Ultra Lite is a panel dedicated to the control of medium and medium-low frequencies, now with anti-scratch resistance. It acts simultaneously as an absorber and a reflector, controlling excess energy in a room without compromising its ambience. This helps to create listening spaces with a natural, bright sound.


The panel's revolutionary design is further enhanced by the addition of a wood surface. Long known for its excellent acoustic properties, the wood also adds elegance and modernity to the panel, making it suitable for use in any type of space.

The Flexi Wood panel is available in two different thicknesses for use in different frequency ranges. Flexi Wood Ultra Lite is designed to perform to maximum effect between 400 and 1250 Hz.

## **Applications**

Listening Rooms, Home Theaters, Recording and Broadcast Studios, Post Production Studios, Office, Rehearsal Rooms, Conference and Teleconference Rooms, Auditoriums, etc.

## Performance

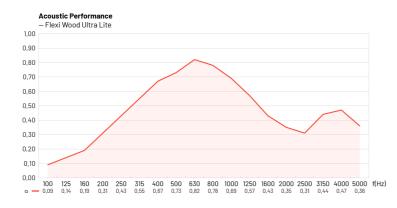

### **Available Finishes\***

## **6Melamine Colors**

- Black Matte
- White Matte
  Dark Wenge
- Dark wenge
  Brown Oak
- Natural Oak
- Locarno Cherry
- Loodino oneny

\* Different batches may show a color variation

#### **Dimensions\*\***

a) 595 x 595 x 54 mm \*/ 23.4" x 23.4" x 2.1"

\*\* For each panel. Please notice that the dimensions of these panels have a tolerance of +/- 2mm

### **Packing Information**

Units per box: 6 Box: 620x620x330mm / 24.4"x24.4"x13" Box Gross Weight: 12.2kg / 26.9lb

### **Technical Information**

Material: Polyurethane Foam, MDF and Melamine

**Installation:** Flexi Glue Ultra (or VicFix J Profile fixation system using VicFix Base)

#### V2-Apr.20

www.vicoustic.com

