


## Projector specs for dnp LaserPanels

<b>Type</b>	DLP
<b>DMD</b>	0.65" 1080p S600, DMD + DDP4422
<b>Resolution</b>	1920 x 1080 (16:9)
<b>Light Source</b>	LASER Diode (23ea)
<b>Brightness (ANSI)</b>	3000 +/- 10%
<b>Hours to 50% brightness</b>	>20,000 hours in normal mode. >30,000 hours in eco mode
<b>Contrast</b>	1800:1 (Native) / 10,000:1 (APM)
<b>Uniformity (JBMA)</b>	Typ: 80%; Min: 70%
<b>Lens</b>	f/2.4
<b>Throw Ratio</b>	0.25:1
<b>Speaker</b>	10W x 1
<b>Wireless</b>	WiDi Gen5
<b>3D</b>	Yes
<b>Interactivity*</b>	IR camera + IR pens
<b>Input I/O</b>	VGA In X 2 (1 VGA In; 1 VGA In/Out selected by OSD) Audio In Jack X 1 Composite Video X 1 Composite Audio In (RCA) X 1 pair HDMI X 2 (One Support MHL 2.0) Microphone X 1 RS-232C X 1 Mini USB X 1 (for F/W upgrade or light curtain )
<b>Output I/O</b>	VGA Out X 1 (VGA In/Out selected by OSD) Audio Out Jack X 1
<b>Multimedia, (AM8250)</b>	RJ45 X 1 (Support Projector control, Web management , Video streaming) USB-A X 1 (support video streaming via optional WiFi dongle** or local playback)
<b>LAN Control Only</b>	LAN Control Only RJ45 X1 (Support Projector control , Web management)
<b>Light Curtain Touch</b>	Light Curtain Touch Interactive Jack X 1 (Connect to Light Curtain Module***)
<b>Voltage</b>	100-240 VAC 50/60 Hz, 3.5A
<b>Maximum power use</b>	335 W
<b>Stand-by power use</b>	< 0.5 W
<b>Outer dimensions</b>	382 x 310 x 126 mm
<b>Weight</b>	6 kg
<b>Connection to mount</b>	(4ea) 130 x 88 mm

\*) Touch version only

\*\*) Included in Touch version. Optional for standard version

\*\*\*) Optional

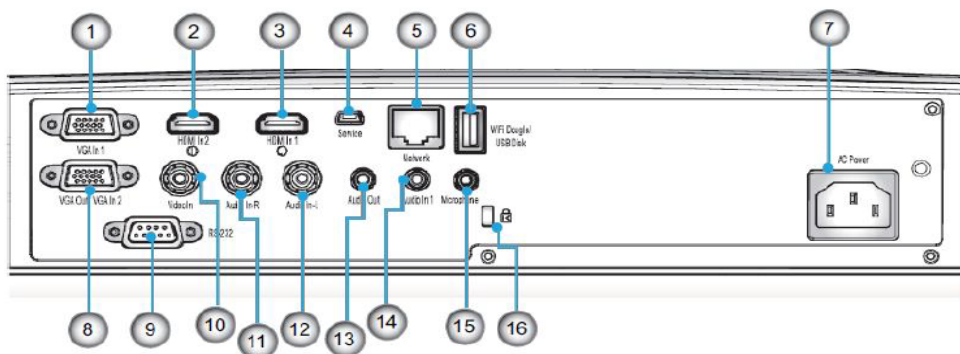

- |   |   |
|---|---|
| <ol style="list-style-type: none"> <li>1. VGA1-In/YPbPr Connector</li> <li>2. HDMI2 Input Connector</li> <li>3. HDMI1 Input Connector</li> <li>4. USB Connector</li> <li>5. RJ45 Connector</li> <li>6. USB Type A Connector</li> <li>7. Power Socket</li> <li>8. VGA-Out/VGA2-In Connector</li> </ol> | <ol style="list-style-type: none"> <li>9. RS-232 Connector (9-pin DIN Type)</li> <li>10. Composite Video Input Connector</li> <li>11. Composite Audio Input (right) Connector</li> <li>12. Composite Audio Input (left) Connector</li> <li>13. Audio Output Connector (3.5mm mini Jack)</li> <li>14. Audio Input Connector (3.5mm mini jack)</li> <li>15. Audio Input Connector (microphone)</li> <li>16. Kensington Lock Port</li> </ol> |
|---|---|